




Part Number: **B02-0803020-010**

Revision 2021-Nov-18 - Generated 2021-Nov-24

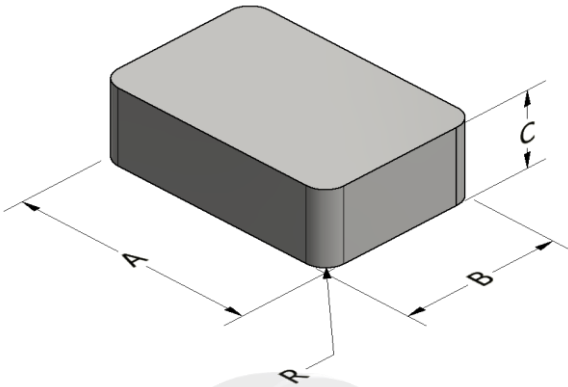

A	80.00 ± 0.50 mm	3.150 ± 0.020 in
B	30.00 ± 0.50 mm	1.181 ± 0.020 in
C	20.00 ± 0.50 mm	0.787 ± 0.020 in
R	1.5 ± 0.50 mm	0.059 ± 0.020 in
μ_i (reference)	10	
Mass	(approximate)	240 grams
Core Loss	$\text{Core Loss (mW/cm}^3\text{)} = \frac{a}{B_{pk}^3} + \frac{b}{B_{pk}^{2.3}} + \frac{c}{B_{pk}^{1.65}} + d \cdot B_{pk}^2 \cdot f^2$	
	where B_{pk} expressed in gauss, f expressed in hertz, and: $a=4.00E+09$, $b=3.00E+08$, $c=2.70E+06$, $d=9.60E-16$	
	B_{pk}	140 G
	frequency	100 kHz
	Core Loss (nominal)	18 mW/cm ³
	Core Loss (maximum)	20 mW/cm ³
DC Saturation	$\% \mu_i = \frac{1}{a + b \cdot H^c} + d$	
	where H expressed in oersteds, and: $a=0.01$, $b=1.83E-07$, $c=1.46$, $d=0.00$	
	H_{DC}	200 Oe
	Percent Initial Perm(nom.)	95.9%
	Percent Initial Perm(min.)	94.8%
Coating/Pkg	Coating Type:	None
	Voltage Breakdown (min.)	N/A
	Limit	N/A
	Package Quantity	48 Pieces/Box

