




Part Number: IC065B08C-660
 Revision 20200517 - Generated 2020-May-18



A	6.45 ± 0.15 mm	0.254 ± 0.006 in
B	6.45 ± 0.15 mm	0.254 ± 0.006 in
C	0.80 ± 0.10 mm	0.031 ± 0.004 in
D	1.90 mm (nom.)	0.075 in (nom.)
E	4.25 mm (nom.)	0.167 in (nom.)
F	0.20 ± 0.05 mm	0.008 ± 0.002 in
G	6.25 ± 0.15 mm	0.246 ± 0.006 in
Mass	(approximate)	0.18 grams
Core Loss	$\text{Core Loss (mW/cm}^3\text{)} = \frac{a}{B_{pk}^3} + \frac{b}{B_{pk}^{2.3}} + \frac{c}{B_{pk}^{1.65}} + d \cdot B_{pk}^2 \cdot f^2$	
	where B_{pk} expressed in gauss, f expressed in hertz, and: $a=1.72E+10$, $b=4.96E+07$, $c=1.23E+06$, $d=1.73E-14$	
	B_{pk}	140 G
	frequency	100 kHz
	Core Loss (nominal)	17 mW/cm ³
Core Loss (maximum)	20 mW/cm ³	
DC Saturation	$\% \mu_i = \frac{1}{a + b \cdot H^c} + d$	
	where H expressed in oersteds, and: $a=1.00E-02$, $b=1.23E-05$, $c=1.48$, $d=0.00$	
	H_{dc}	50 Oe
	Percent Initial Perm.(nom.)	71.0%
Percent Initial Perm.(min.)	65.1%	
Coating/Pkgs	Coating Type:	Per UL Card File #E140098(S), Black, Outer Surface only
	Voltage Breakdown (min.)	N/A
	Limit	N/A
	Package Quantity	30,000/Box

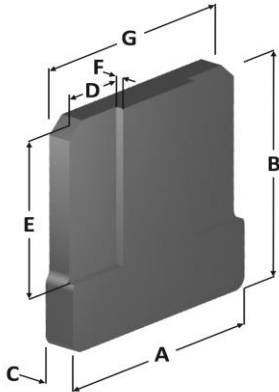