




Part Number:

OE-025026-8

Revision 2021-Dec-01 - Generated 2021-Dec-01

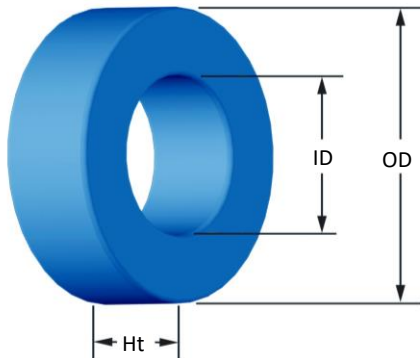

(If coated, Max./Min. includes coating)

OD	(nom. - bare core) (max.)	6.35 mm 6.99 mm	0.250 in 0.275 in
ID	(nom. - bare core) (min.)	2.79 mm 2.29 mm	0.110 in 0.090 in
HT	(nom. - bare core) (max.)	2.79 mm 3.43 mm	0.110 in 0.135 in
Mass	(approximate)	0.37 grams	
Magnetic Dimensions	A _e - Eff. Mag. Cross Section	0.0476 cm ²	
	L _e - Eff. Mag. Path Length	1.36 cm	
	V _e - Eff. Core Volume	0.0642 cm ³	
	WA - Min. Eff. Window Area	0.0412 cm ²	
	sa - Surface Area	1.80 cm ²	
	mlt - mean length per turn	1.27 cm	
Inductance	μ _i (reference)	26	
	A _L value (nominal)	10 nH/N ²	
	Test Winding	N=30, #32 AWG	
	Frequency	10 kHz	
	Voltage on Agilent 4284A	0.006 V	
	AL tolerance	±8%	
Core Loss	$\text{Core Loss(mW/cm}^3\text{)}: \frac{a}{B_{pk}^3} + \frac{b}{B_{pk}^{2.3}} + \frac{c}{B_{pk}^{1.65}} + d \cdot B_{pk}^2 \cdot f^2$		
	where B_{pk} expressed in gauss, f expressed in hertz, and: $a=1.000E+06$, $b=2.872E+08$, $c=2.868E+06$, $d=2.365E-14$		
	B _{pk}	300 G	
	frequency	100 kHz	
	Core Loss (nominal)	145 mW/cm ³	
Core Loss (maximum)	166 mW/cm ³		
DC Saturation	$\% \mu_i \frac{1}{a + b \cdot H^c} + d$		
	where H expressed in oersteds, and: $a=1.000E-02$, $b=3.081E-07$, $c=1.754$, $d=0.000$		
	H _{DC}	200 Oe	
	Percent Initial Perm(nom.)	75.0%	
Percent Initial Perm(min.)	68.5%		
Coating/Pkg	Coating Type:	Parylene N	
	Voltage Breakdown (min.)	500 Vrms	
	Limit	0.1 mA, 5 s	
	Package Quantity	21,600 Pcs/Box	

