








**Part Number:** PMS-060035-040-2  
Revision: 2026-Apr-30

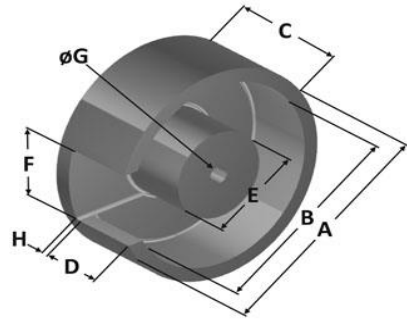

<b>A</b>	60.50 ± 0.50 mm	2.382 ± 0.020 in											
<b>B</b>	51.50 ± 0.50 mm	2.028 ± 0.020 in											
<b>C</b>	17.50 ± 0.25 mm	0.689 ± 0.010 in											
<b>D</b>	10.25 ± 0.25 mm	0.404 ± 0.010 in											
<b>E</b>	25.30 ± 0.30 mm	0.996 ± 0.012 in											
<b>F</b>	14.80 ± 0.30 mm	0.583 ± 0.012 in											
<b>G</b>	4.50 ± 0.10 mm	0.177 ± 0.004 in											
<b>Mass</b>	(approximate)	130 grams/half											
<b>Magnetic Dimensions</b>	A <sub>e</sub> - Eff. Mag. Cross Section	5.97 cm <sup>2</sup>											
	L <sub>e</sub> - Eff. Mag. Path Length	8.33 cm											
	V <sub>e</sub> - Eff. Core Volume	49.7 cm <sup>3</sup>											
	WA - Min. Eff. Window Area	2.54 cm <sup>2</sup>											
	sa - Surface Area	124 cm <sup>2</sup>											
mlt - mean length per turn		12.1 cm											
<b>Inductance</b>	μ <sub>i</sub> (reference)	40											
	A <sub>L</sub> value (nominal)	360 nH/N <sup>2</sup>											
	Test Winding	N=TBD, #TBD AWG											
	Frequency	10k Hz											
	Voltage on Agilent 4284A	TBD											
A <sub>L</sub> tolerance	Ref Only												
<b>Core Loss</b>	$\text{Core Loss (mW/cm}^3\text{)} = \frac{f}{\frac{a}{Bpk^3} + \frac{b}{Bpk^{2.3}} + \frac{c}{Bpk^{1.65}}} + d \cdot Bpk^2 \cdot f^2$												
	where B <sub>pk</sub> expressed in gauss, f expressed in hertz, and: a=1.0000E+06, b=6.8019E+08, c=8.0694E+06, d=2.1578E-14												
	B <sub>pk</sub>	1000 G											
	frequency	50k Hz											
	Core Loss (nominal)	338 mW/cm <sup>3</sup>											
Core Loss (maximum)	388 mW/cm <sup>3</sup>												
<b>DC Saturation</b>	$\% \mu_i = \frac{1}{a + b \cdot H^c} + d$												
	where H expressed in oersteds, and: a=1.0000E-02, b=2.5417E-06, c=1.6796, d=0.0000												
	H <sub>DC</sub>	100 Oe											
	Percent Initial Perm(nom.)	63.2 %											
Percent Initial Perm(min.)	55.9 %												
<b>Coating/Pkg</b>	Coating Type:	Blue Epoxy											
	Voltage Breakdown (min.)	N/A											
	Limit	N/A											
	Package Quantity	TBD Halves/Box											
<b>Winding Table</b>	<b>Wire Size</b>	AWG	8	10	12	14	16	18	20	22	24	26	28
		mm	3.150	2.500	2.000	1.600	1.250	1.000	0.800	0.630	0.500	0.400	0.315
	<b>Full Winding</b>	Turns	14	21	33	51	79	122	188	291	451	698	1,080
		Rdc(Ω)	3.5 m	8.3 m	20.7 m	50.9 m	125.4 m	307.9 m	754.6 m	1.9	4.6	11.3	27.7

Special Spec: Preliminary.

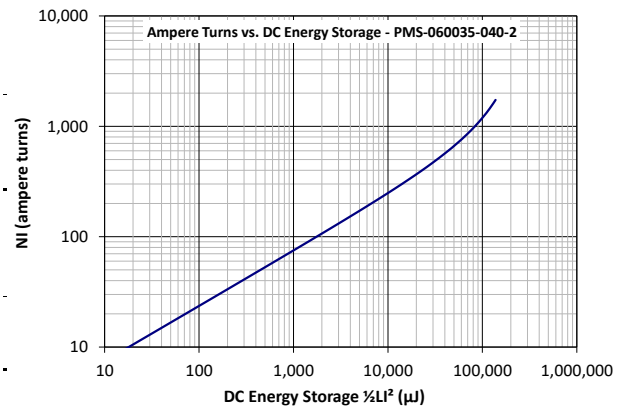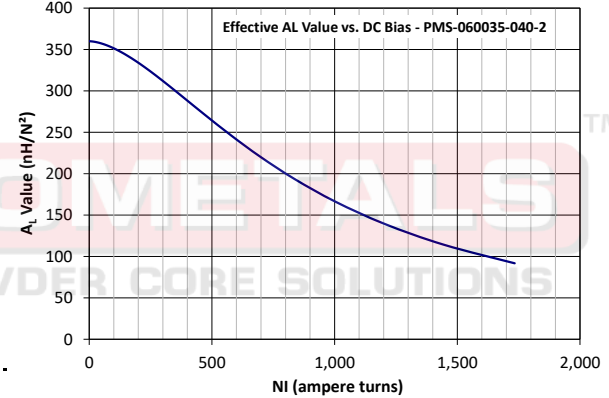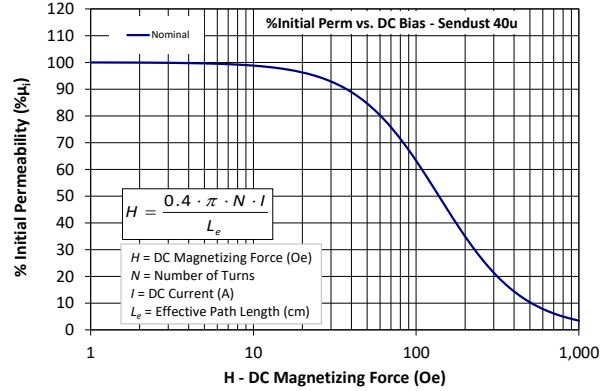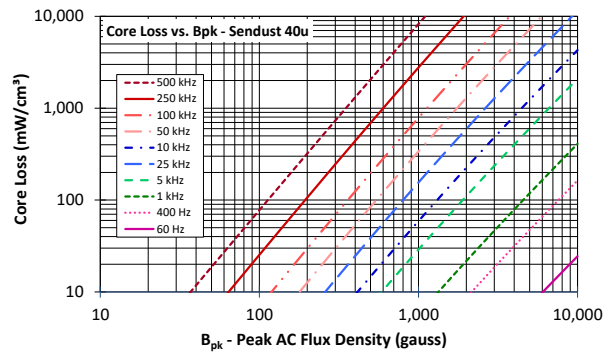

**Handling and Storage:** Cores should be stored in the original unopened packaging between -10°C and +50°C and less than 60% relative humidity. After the original packaging is opened, the cores should be stored between -8°C and +25°C less than 30% relative humidity. Gloves should be used when handling uncoated cores. The cores should also be sheltered from rain, moisture, salt water, salt air, plasters, ashes, sulfur, sulfur dioxide, ammonia sulfates, soils, acids, metals shavings, and solvents.

**Operating Temperature:** Cores can be used continuously at operating temperatures between -60°C and +200°C.

**RoHS 2.0, REACH and ISO (TS16949, ISO 9001, ISO 14001) compliant. Statements available for download at [www.micrometalsapc.com](http://www.micrometalsapc.com).**