








Part Number: EQFS-205140064-040

Revision 20201124 - Generated 2020-Nov-24

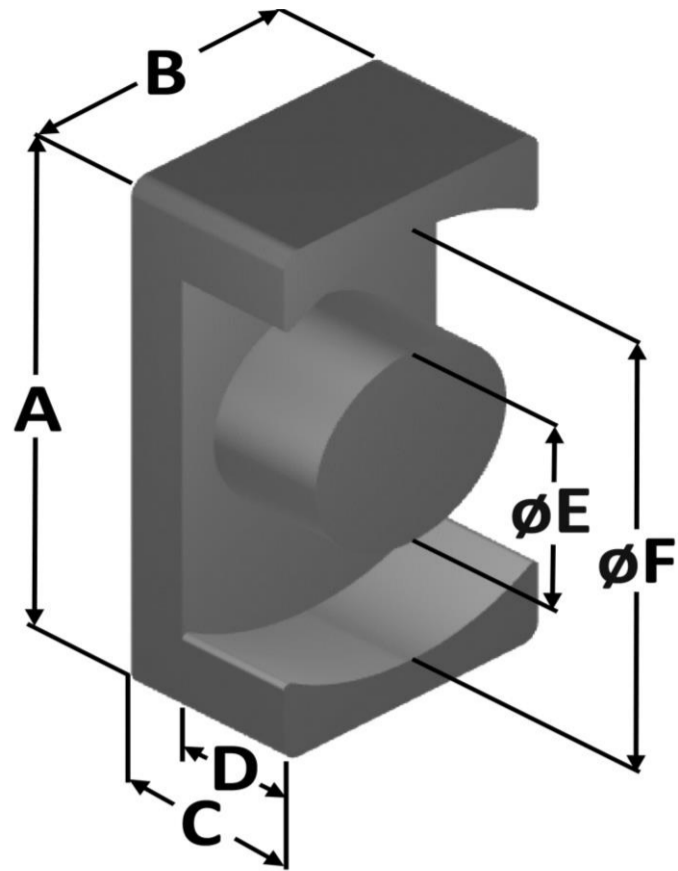

A	20.5 ± 0.30 mm	0.807 ± 0.012 in											
B	14 ± 0.20 mm	0.551 ± 0.008 in											
C	6.4 ± 0.20 mm	0.252 ± 0.008 in											
D	3.7 mm (min.)	0.146 in (min.)											
E	8.8 ± 0.20 mm	0.346 ± 0.008 in											
F	17.8 mm (min.)	0.701 in (min.)											
Mass	(approximate)	6.7 grams/half											
Magnetic Dimensions	A _e - Eff. Mag. Cross Section	0.608 cm ²											
	L _e - Eff. Mag. Path Length	3.84 cm											
	V _e - Eff. Core Volume	2.33 cm ³											
	WA - Min. Eff. Window Area	0.325 cm ²											
	sa - Surface Area	15.3 cm ²											
	mlt - mean length per turn	4.18 cm											
Inductance	μ _i (reference)	40											
	A _L value (nominal)	79 nH/N ²											
	Test Winding	N=15, #26 AWG											
	Frequency	10 kHz											
	Voltage on Agilent 4284A	0.040 V											
	A _L tolerance	±12%											
Core Loss	$\text{Core Loss (mW/cm}^3\text{)} = \frac{f}{\frac{a}{B_{pk}^3} + \frac{b}{B_{pk}^{2.3}} + \frac{c}{B_{pk}^{1.65}}} + d \cdot B_{pk}^2 \cdot f^2$												
	where B _{pk} expressed in gauss, f expressed in hertz, and: a=1.00E+06, b=2.97E+08, c=2.78E+06, d=4.56E-14												
	B _{pk}	1000 G											
	frequency	50 kHz											
	Core Loss (nominal)	843 mW/cm ³											
Core Loss (maximum)	969 mW/cm ³												
DC Saturation	$\% \mu_i = \frac{1}{a + b \cdot H^c} + d$												
	where H expressed in oersteds, and: a=0.01, b=2.72E-06, c=1.52, d=0.00												
	H _{DC}	100 Oe											
	Percent Initial Perm(nom.)	77.4%											
Percent Initial Perm(min.)	72.2%												
Coating/Pkg	Coating Type:	None											
	Voltage Breakdown (min.)	N/A											
	Limit	N/A											
	Package Quantity	1,560 Halves/Box											
Winding Table	Wire Size	AWG	18	20	22	24	26	28	30	32	34	36	38
		mm	1.000	0.800	0.630	0.500	0.400	0.315	0.250	0.200	0.160	0.125	0.100
	Full Winding	Turns	16	24	37	58	89	138	214	332	513	794	1,230
		Rdc(Ω)	14.0 m	33.4 m	81.8 m	203.9 m	497.7 m	1.2	3.0	7.5	18.4	45.2	111.3

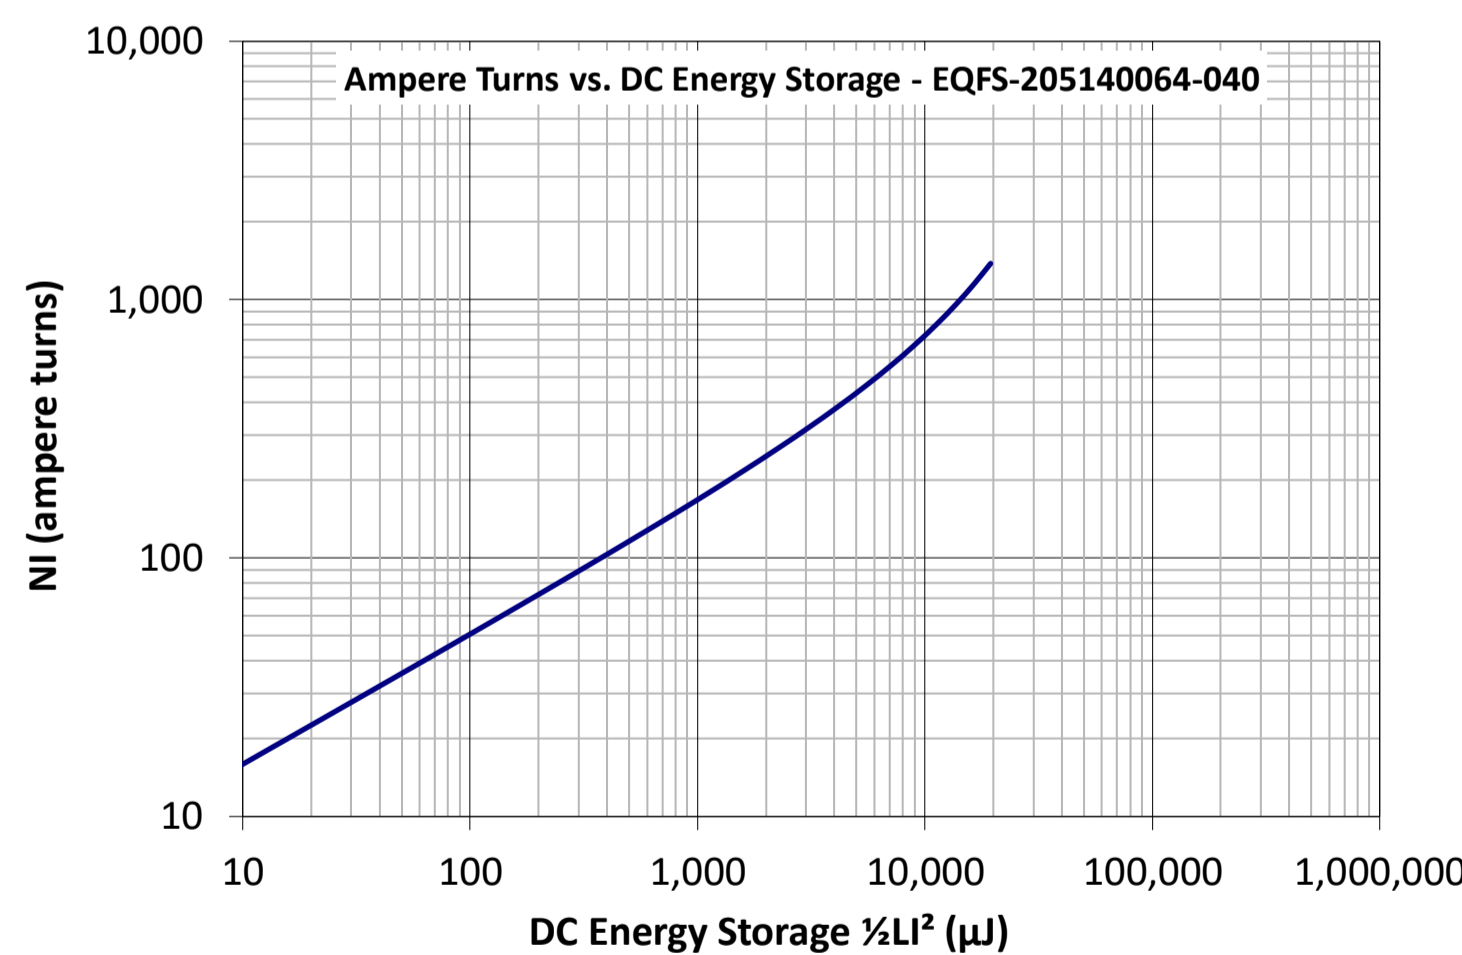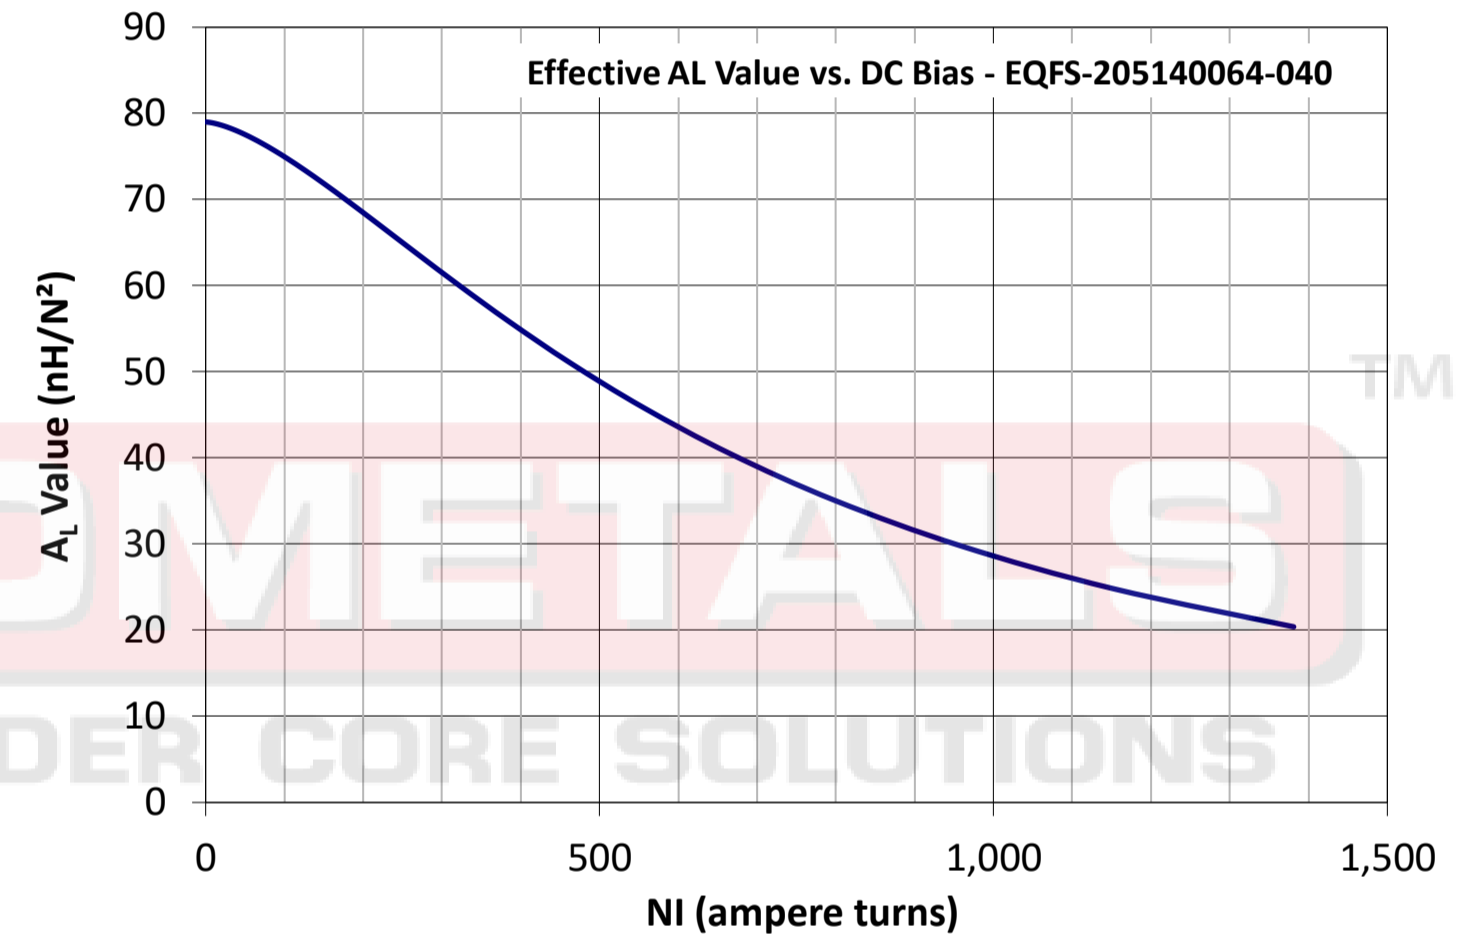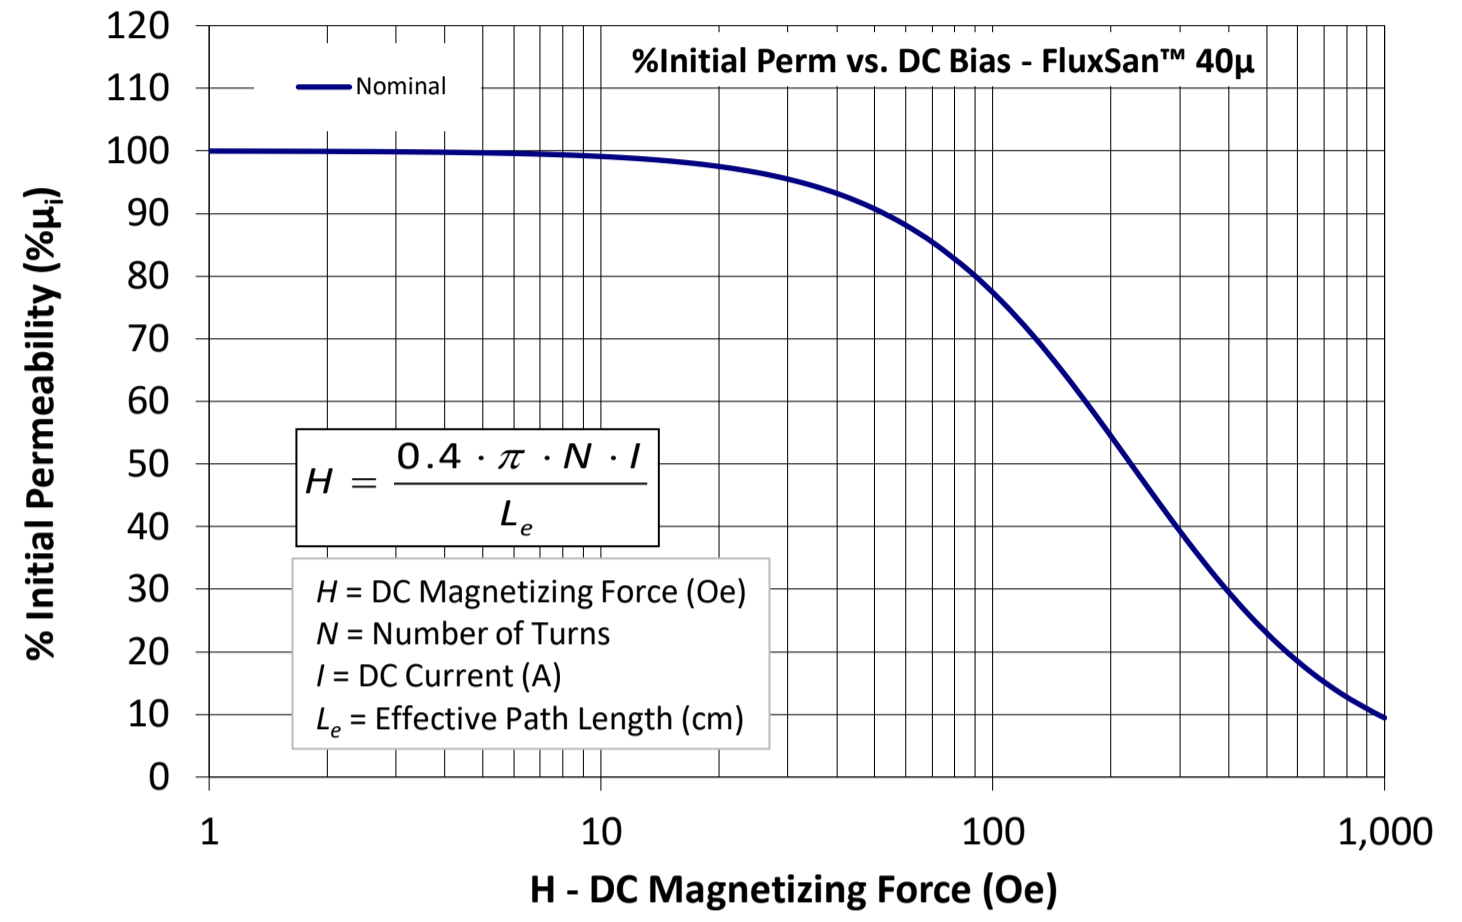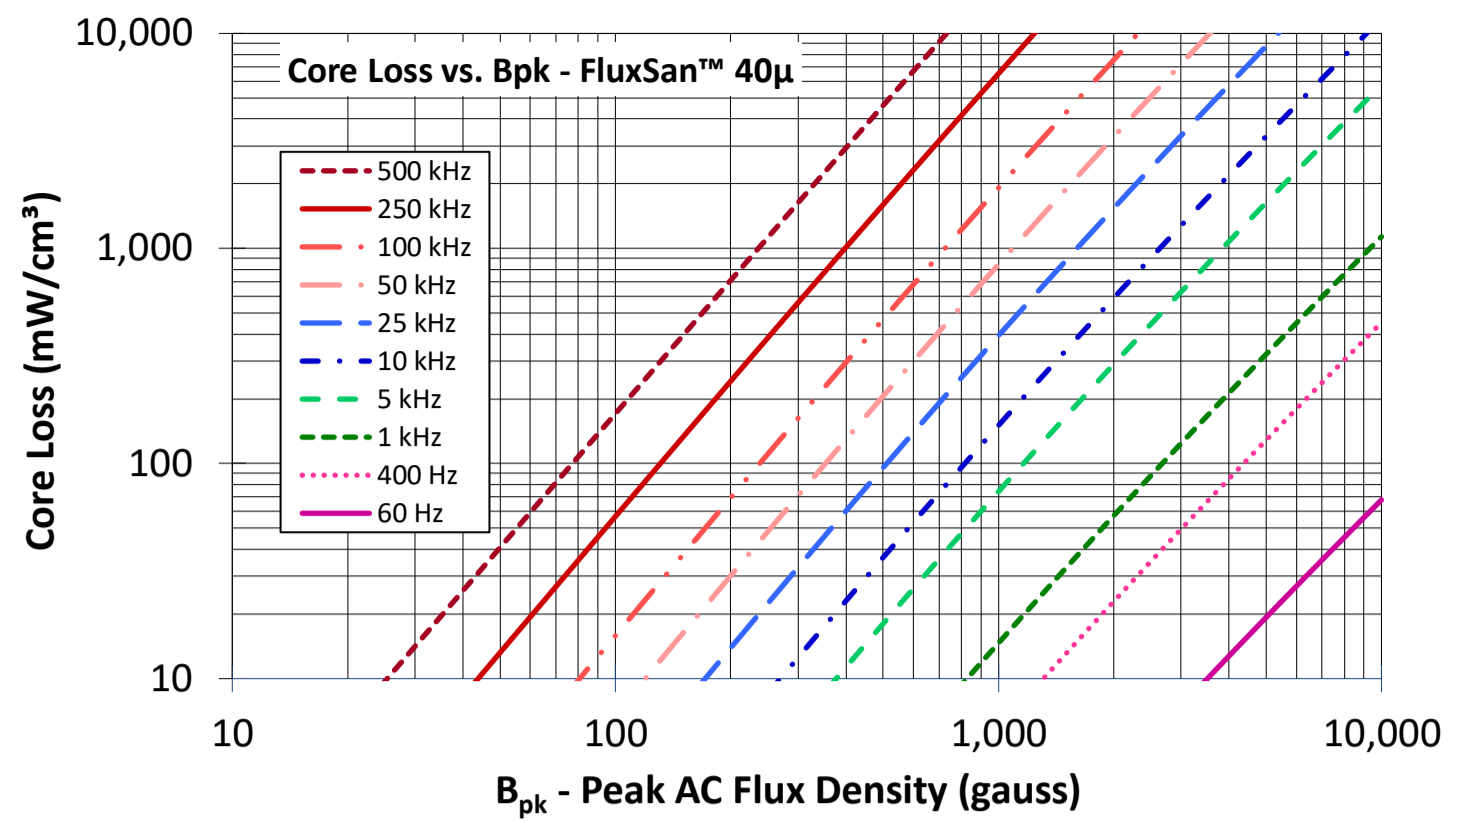

Handling and Storage: Cores should be stored in the original unopened packaging between -10°C and +50°C and less than 60% relative humidity. After the original packaging is opened, the cores should be stored between -8°C and +25°C less than 30% relative humidity. Gloves should be used when handling uncoated cores. The cores should also be sheltered from rain, moisture, salt water, salt air, plasters, ashes, sulfur, sulfur dioxide, ammonia sulfates, soils, acids, metals shavings, and solvents.

Operating Temperature: Cores can be used continuously at operating temperatures between -60°C and +200°C.

RoHS 2.0, REACH and ISO (TS16949, ISO 9001, ISO 14001) compliant. Statements available for download at www.micrometalsapc.com.