




Part Number: PMS-060030-014-2





Revision: 2026-May-07

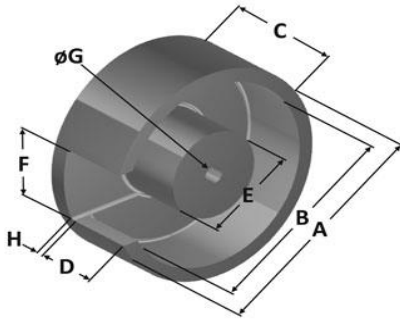

A	60.50 ± 0.50 mm	2.382 ± 0.020 in
B	51.50 ± 0.50 mm	2.028 ± 0.020 in
C	15.00 ± 0.25 mm	0.591 ± 0.010 in
D	7.75 ± 0.25 mm	0.305 ± 0.010 in
E	25.30 ± 0.30 mm	0.996 ± 0.012 in
F	14.80 ± 0.30 mm	0.583 ± 0.012 in
G	4.50 ± 0.10 mm	0.177 ± 0.004 in
Mass	(approximate)	100 grams/half
Magnetic Dimensions	A _e - Eff. Mag. Cross Section	6.07 cm ²
	L _e - Eff. Mag. Path Length	7.37 cm
	V _e - Eff. Core Volume	44.7 cm ³
	WA - Min. Eff. Window Area	1.91 cm ²
	sa - Surface Area	115 cm ²
	mlt - mean length per turn	12.1 cm
Inductance	μ _i (reference)	14
	A _L value (nominal)	144 nH/N ²
	Test Winding	N=TBD, #TBD AWG
	Frequency	10k Hz
	Voltage on Agilent 4284A	TBD
	A _L tolerance	Ref Only
Core Loss	$\text{Core Loss (mW/cm}^3\text{)} = \frac{f}{\frac{a}{Bpk^3} + \frac{b}{Bpk^{2.3}} + \frac{c}{Bpk^{1.65}}} + d \cdot Bpk^2 \cdot f^2$	
	where B _{pk} expressed in gauss, f expressed in hertz, and: a=1.0000E+06, b=2.8399E+08, c=5.3788E+06, d=1.4205E-14	
	B _{pk}	300 G
	frequency	100k Hz
	Core Loss (nominal)	112 mW/cm ³
	Core Loss (maximum)	129 mW/cm ³
DC Saturation	$\% \mu_i = \frac{1}{a + b \cdot H^c} + d$	
	where H expressed in oersteds, and: a=1.0000E-02, b=5.7427E-07, c=1.7317, d=0.0000	
	H _{DC}	200 Oe
	Percent Initial Perm(nom.)	64.3 %
	Percent Initial Perm(min.)	56.8 %
Coating/Pkg	Coating Type:	Blue Epoxy
	Voltage Breakdown (min.)	N/A
	Limit	N/A
	Package Quantity	TBD Halves/Box

Winding Table	Wire Size	AWG	10	12	14	16	18	20	22	24	26	28	30
		mm	2.500	2.000	1.600	1.250	1.000	0.800	0.630	0.500	0.400	0.315	0.250
	Full Winding	Turns	16	25	38	59	91	141	219	338	524	810	1,254
		Rdc(Ω)	6.3 m	15.7 m	37.9 m	93.6 m	229.7 m	565.9 m	1.4	3.4	8.5	20.8	51.2

Special Spec: Preliminary

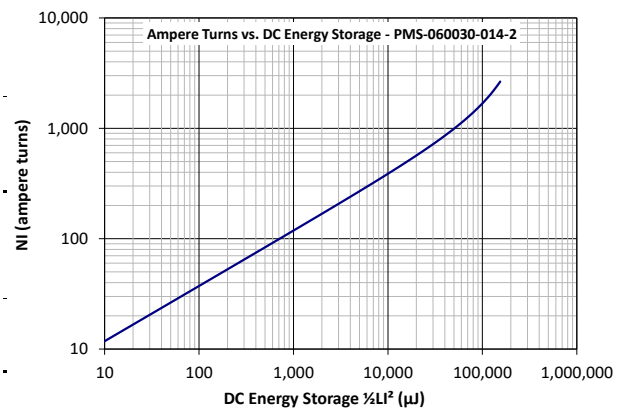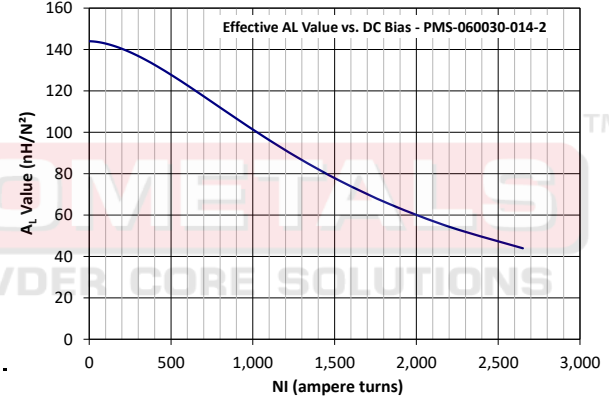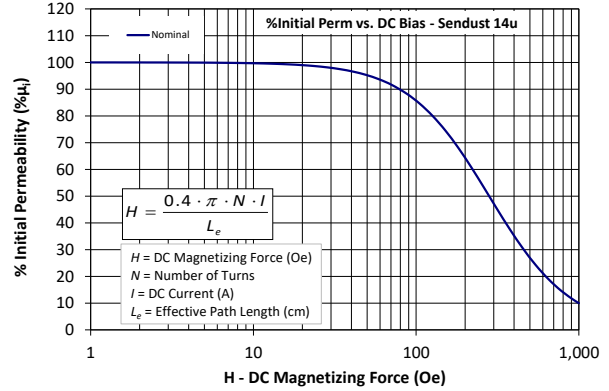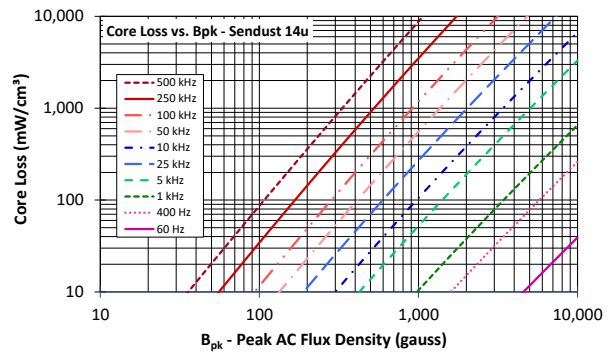

Handling and Storage: Cores should be stored in the original unopened packaging between -10°C and +50°C and less than 60% relative humidity. After the original packaging is opened, the cores should be stored between -8°C and +25°C less than 30% relative humidity. Gloves should be used when handling uncoated cores. The cores should also be sheltered from rain, moisture, salt water, salt air, plasters, ashes, sulfur, sulfur dioxide, ammonia sulfates, soils, acids, metals shavings, and solvents.

Operating Temperature: Cores can be used continuously at operating temperatures between -60°C and +200°C.

RoHS 2.0, REACH and ISO (TS16949, ISO 9001, ISO 14001) compliant. Statements available for download at www.micrometalsapc.com.